

{4.1절}

$$4.23 \quad P = 40 \text{ N}, \quad Q = 50 \text{ N} \\ a = 0.10 \text{ m}, \quad b = 0.04 \text{ m}, \quad c = 0.20 \text{ m}$$

(a) S; 모멘트 평형, 힘의 평형, 반력 유형 1&amp;2

$$+\uparrow\sum M_A = 0, \rightarrow\sum F_x = 0, \uparrow\sum F_y = 0$$

$$\text{A;} +\uparrow\sum M_A = 0 ; \quad cB - aP - bQ = 0$$

$$\Rightarrow B = \frac{aP + bQ}{c}$$

$$= \frac{(0.10 \text{ m})(40 \text{ N}) + (0.04 \text{ m})(50 \text{ N})}{0.20 \text{ m}} = 30.0 \text{ N}$$

$$\rightarrow\sum F_x = 0 ; \quad A_x + P = 0 \Rightarrow A_x = -P = -40.0 \text{ N}$$

$$\uparrow\sum F_y = 0 ; \quad A_y + B - Q = 0$$

$$\Rightarrow A_y = -B + Q = -(30.0 \text{ N}) + (50.0 \text{ N}) = 20.0 \text{ N}$$

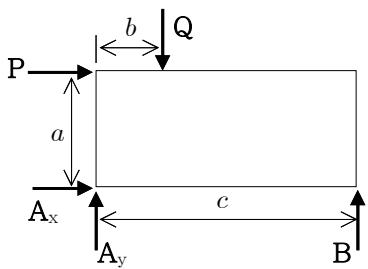
$$A = \sqrt{A_x^2 + A_y^2} = \sqrt{(-40.0 \text{ N})^2 + (20.0 \text{ N})^2} = 44.72 \text{ N}$$

$$\theta = \tan^{-1} \frac{A_y}{A_x} = \tan^{-1} \frac{20.0 \text{ N}}{-40.0 \text{ N}} = \tan^{-1}(-0.500) = -26.6^\circ$$

$$\Rightarrow \quad \mathbf{A} = 44.7 \text{ N} \angle 26.6^\circ, \quad \mathbf{B} = 30.0 \text{ N} \uparrow$$

R; (예:  $+\uparrow\sum M_B = 0$  을 사용하면?)T; (예:  $A_x$ 가 음수인 의미는?)

M; 자유물체도(F.B.D.)

(b)  $\alpha = 30^\circ$ 

S; 모멘트 평형, 힘의 평형, 반력 유형 1&amp;2

$$+\uparrow\sum M_A = 0, \rightarrow\sum F_x = 0, \uparrow\sum F_y = 0$$

$$\text{A;} +\uparrow\sum M_A = 0 ; \quad cB \cos\alpha - aP - bQ = 0$$

$$\Rightarrow B = \frac{aP + bQ}{c \cos\alpha}$$

$$= \frac{(0.10 \text{ m})(40 \text{ N}) + (0.04 \text{ m})(50 \text{ N})}{(0.20 \text{ m}) \cos 30^\circ} = 34.64 \text{ N}$$

$$\rightarrow\sum F_x = 0 ; \quad A_x + P - B \sin\alpha = 0$$

$$\Rightarrow A_x = -P + B \sin\alpha = -(40.0 \text{ N}) + (34.64 \text{ N}) \sin 30^\circ = -22.68 \text{ N}$$

$$\uparrow\sum F_y = 0 ; \quad A_y + B \cos\alpha - Q = 0$$

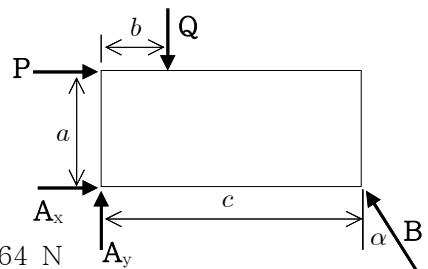
$$\Rightarrow A_y = -B \cos\alpha + Q = -(34.64 \text{ N}) \cos 30^\circ + (50.0 \text{ N}) = 20.0 \text{ N}$$

$$A = \sqrt{A_x^2 + A_y^2} = \sqrt{(-22.68 \text{ N})^2 + (20.0 \text{ N})^2} = 30.24 \text{ N}$$

$$\theta = \tan^{-1} \frac{A_y}{A_x} = \tan^{-1} \frac{20.0 \text{ N}}{-22.68 \text{ N}} = \tan^{-1}(-0.882) = -41.4^\circ$$

$$\Rightarrow \quad \mathbf{A} = 30.2 \text{ N} \angle 41.4^\circ, \quad \mathbf{B} = 34.6 \text{ N} \angle 60.0^\circ$$

M; 자유물체도(F.B.D.)

R; (예:  $+\uparrow\sum M_B = 0$  을 사용하면?)T; (예:  $A_x$ 가 음수인 의미는?)

4.46      $T = 1,300 \text{ N}$ ,    $P = 750 \text{ N}$ ,    $Q = 450 \text{ N}$   
 $a = 0.5 \text{ m}$ ,  $b = 0.4 \text{ m}$ ,  $c = 0.15 \text{ m}$ ,  $d = 0.25 \text{ m}$ ,  $e = 0.6 \text{ m}$

S; 힘의 평형, 모멘트 평형, 반력 유형 1&3

$$\rightarrow \sum F_x = 0, \uparrow \sum F_y = 0, + \uparrow \sum M_C = 0,$$

A;     $T_x = \frac{5}{13} T = \frac{5}{13} (1,300 \text{ N}) = 500 \text{ N}$

$$T_y = \frac{12}{13} T = \frac{12}{13} (1,300 \text{ N}) = 1,200 \text{ N}$$

$$\rightarrow \sum F_x = 0 ; C_x - Q + T_x = 0$$

$$\Rightarrow C_x = Q - T_x = (450 \text{ N}) - (500 \text{ N}) = -50 \text{ N}$$

$$\uparrow \sum F_y = 0 ; C_y - P - T_y = 0$$

$$\Rightarrow C_y = P + T_y = (750 \text{ N}) + (1,200 \text{ N}) = 1,950 \text{ N}$$

$$C = \sqrt{C_x^2 + C_y^2} = \sqrt{(-50 \text{ N})^2 + (1,950 \text{ N})^2} = 1,951 \text{ N}$$

$$\theta = \tan^{-1} \frac{C_y}{C_x} = \tan^{-1} \frac{1,950 \text{ N}}{-50 \text{ N}} = \tan^{-1}(-39) = -88.5^\circ$$

$$\Rightarrow \mathbf{C} = 1,951 \text{ N} \angle -88.5^\circ$$

$$+\uparrow \sum M_C = 0 ; M_C + aP + bQ - (c+d)T_y = 0$$

$$\Rightarrow M_C = -aP - bQ + (c+d)T_y$$

$$= -(0.5 \text{ m})(750 \text{ N}) - (0.4 \text{ m})(450 \text{ N}) + (0.4 \text{ m})(1,200 \text{ N}) = -7.50 \text{ N}\cdot\text{m}$$

$$\Rightarrow M_C = 7.50 \text{ N}\cdot\text{m} \uparrow$$

R; (예: 줄 BD의 장력에 의한 힘을 B에 작용하면?)

T; (예:  $M_C$ 가 음수인 의미는?)

M; 자유물체도(F.B.D.)

